

- Case: Bayonet-fitted stainless steel, 1.4301
- Liquid filling
- Bezel: Bayonet-fitted stainless steel, 1.4301
- With front flange for panel mounting
- Dial: Aluminium, white varnished
lettering and graduation black
- Red mark
- Imprint
- Double scale °C/°F
- Pointer: Aluminium, black
adjustable at end of stem
- Stem end welded
- Silicone damped
- Window: Instrument glass
- Safety glass
- Max. drag pointer
- Max./min. drag pointer
- Red mark pointer
- Seal washer: Rubber, black
- Stem: G 1/2 A stainless steel V2a, A/F 27, with fixing screw
multi-part welded - tube Ø 10 x 0.9 mm 1.4571
- Thread 1.4571
- Further connections see overleaf resp. 001
- Connection: Backwards
- Measuring range: 0-120°C
- Resp. opposite
- Accuracy class: 1.0

- Works test certificate


- OPTIONS



	Diam.	63	80	100	160
Stem	28 mm	2460	2480	2500	2560
Stem	45 mm	2461	2481	2501	2561
Stem	50 mm	2462	2482	2502	2562
Stem	63 mm	2463	2483	2503	2563
Stem	80 mm	2464	2484	2504	2564
Stem	100 mm	2465	2485	2505	2565
Stem	120 mm	2466	2486	2506	2566
Stem	160 mm	2467	2487	2507	2567
Stem	200 mm	2468	2488	2508	2568
Stem	250 mm	2469	2489	2509	2569

Meas. range	Graduation
-40+40°C	1.0
-30+50°C	
-20+60°C	
-20+40°C	
-15+45°C	
-10+60°C	
-10+50°C	
0+40°C	
0+50°C	
0+60°C	
0+80°C	2.0
0+100°C	
0+120°C	
0+160°C	
0+200°C	
0+250°C	5.0
0+300°C	
0+400°C	10.0
0+500°C	
0+600°C	

Other lengths are available !
Stem 28 mm only 0-120°C available !
Stem 45 mm shortest measuring span = 60°C !

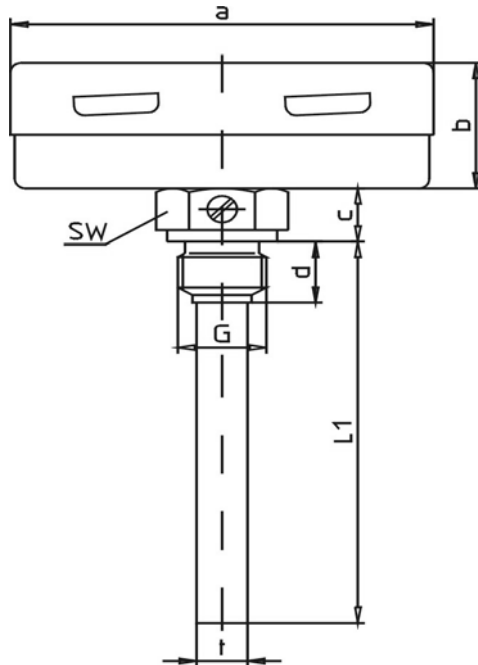

Type	a	b	c	d	SW	G	t
2460	63	32	14	14	27	1/2 A	10
2480	80	33	14	14	27	1/2 A	10
2500	100	27	14	14	27	1/2 A	10
2560	160	33	14	14	27	1/2 A	10

0	1	2	3	4	5	6
Sep. pocket with fixing screw	Fixed connection male thread	Union nut female thread	Union nut with double nipple	Union nut with additional thermowell acc. to DIN 16179 form CD or DIN 43772 form 8	Turnable male thread	Movable clamp connection

Masses and dimensions are conform to current company standard. Changes to improve our gauges will be made without preannouncement.