





- Case:** Stainless steel 1.4301
 - Steel zinced
 - Steel zinced and varnished
 - Bayonet-fitted SS 1.4301 (diam. 63 und 80)
- Bezel:** Stainless steel 1.4301
 - Diam. 80 with rim ring IP 44
 - Steel nickel-plated
- Dial:** Aluminium, white varnished
 lettering and graduation black
 - Red mark
 - Imprint
 - Double scale °C/°F
- Pointer:** Aluminium, black
 - Silicone damped
- Window:** Instrument glass
 - Safety glass (diam. 63 and 80)
 - Max. drag pointer (diam. 63 and 80)
 - Max./min. drag pointer (diam. 63 and 80)
 - Red mark pointer (diam. 63 and 80)
- Distance ring:** Internal
 Diam. 34-63 mm up to 120°C cellular rubber
 from 160°C on aluminium, diam. 80 ALU only
- Stem:** With tip for insertion
- Connection:** Backwards
- Measuring range:** 0-120°C
 - Resp. opposite
- Accuracy class:** 2
 - Accuracy class 1
 - Works test certificate
 - OPTIONS

Version: Article number:
 Stem Ø 4 made of 1.4571 with tip

	Diam.	34	50	63	80	Meas. range	Graduation
Stem	100 mm	1732	1752	1762	1782	-40+40°C -30+50°C	1.0
Stem	200 mm	1734	1754	1764	1784	-20+60°C -20+40°C	
Stem	300 mm	1736	1756	1766	1786	-15+45°C -10+50°C	
Accessories:		- PVC stem protection with Clip				0+40°C 0+60°C 0+80°C	2.0
Version:		Stem Ø 4 made of 1.4571 with tip and foldable handle				0+100°C 0+120°C 0+160°C 0+200°C	
Stem	100 mm	1732-1	1752-1	1762-1	1782-1	0+250°C 0+300°C	5.0
Stem	200 mm	1734-1	1754-1	1764-1	1784-1	0+400°C	
Stem	300 mm	1736-1	1756-1	1766-1	1786-1		10.0

Other lengths are available ! Stem Ø 5, 6, 8 and 9 mm are available on request !

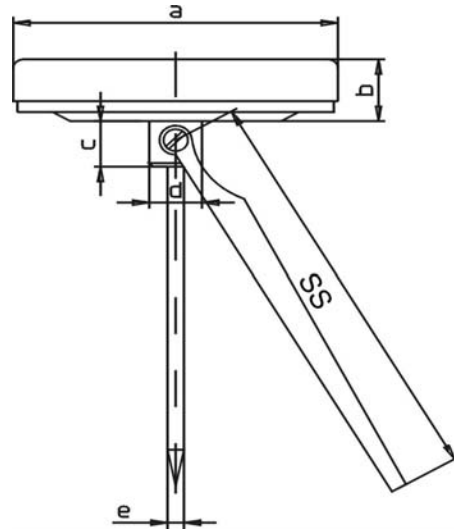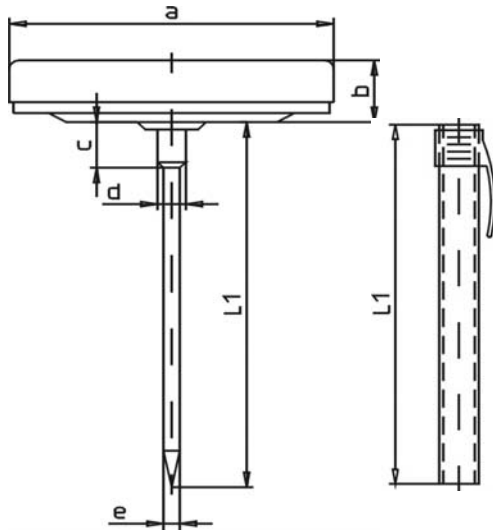

Type	a	b	c	d	e
1730	34	9	12,5	7	4
1750	50	12	12,5	7	4
1760	63	13	12,5	7	4
1780	80	13	12,5	7	4

Type	a	b	c	d	e	SS
1730-1	34	9	10	13	4	110
1750-1	50	12	10	13	4	110
1760-1	63	13	10	13	4	110
1780-1	80	13	10	13	4	110

Masses and dimensions are conform to current company standard. Changes to improve our gauges will be made without preannouncement.