

Case:	Diam. 60 steel zincod - Diam. 50 / 80 / 100 mm
Bezel:	Triangular bezel brass chromed for panel mounting
Dial:	Aluminium, white varnished lettering and graduation black
Pointer:	Aluminium, black
Window:	Instrument glass
Gasket:	Plastic
Capillary:	PVC-coated, black
Mounting method:	With u-clamp for panel mounting
Connection:	Backwards, off-centre
Stem:	Cu-alloy, L = 36 x Ø 8,5 mm With compression spring and round nut M 10 x 1
Measuring range:	0-120°C - Others on request
Accuracy class:	2.0




- OPTIONS

Article number:

Capillary: mtr.	1	2	3	5
Diam. 60	3901	3902	3903	3905

Other lengths resp. versions on request !

Accessories:	Thermowells made of brass G 1/2 B soft soldered					
L =	45	63	80	100	160	200 mm

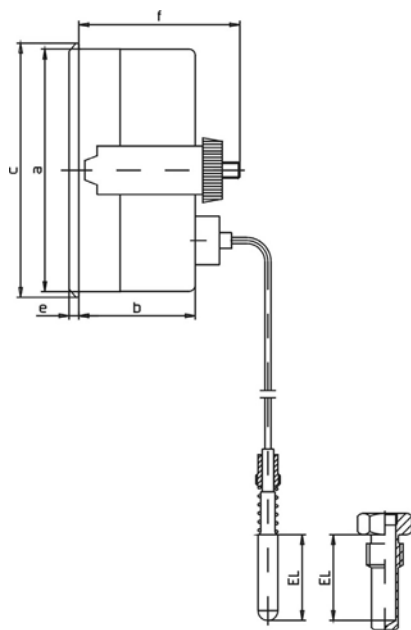

Type	a	b	c	e	f
3900	60	33	64	4	45

Masses and dimensions are conform to current company standard. Changes to improve our gauges will be made without preannouncement.