
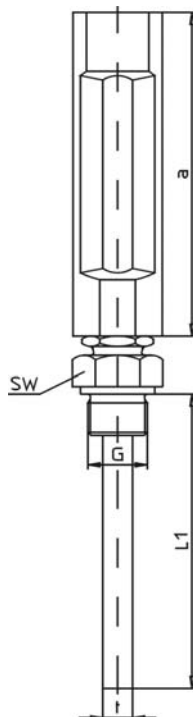


Upper section:	Aluminium, brass anodised, 30 mm wide - 36 mm wide - Anodised aluminium - Made of shining stainless steel	
Figures:	Beneath an anodic coating	
Joint to measuring stem:	Thread M 18 x 1,5 with locknut	
Measuring stem:	G 1/2 A brass - from 300°C on steel - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel 1.4571	
Connection:	Form B - immersion tube with threaded socket - Form C union nut	
Glass tube:	Elastic mounted, graduation acid-proof	
Accuracy class:	1	
Filling:	Up to 200°C alcohol blue From 250°C on mercury cap. yellow backed - Alcohol red - Mercury cap. yellow backed or blue shining	
Capillary form:	Prismatic or round	
Version:	S T R A I G H T	
Stem Ø 10 mm	L= 40 63 75 100 120 160 200	
Measuring range:	Article number	
-30+50°C	4601 4602 4603 4604 4605 4606 4607	
-10+50°C	4611 4612 4613 4614 4615 4616 4617	
0-50°C	4621 4622 4623 4624 4625 4626 4627	
0-60°C	4631 4632 4633 4634 4635 4636 4637	
0-100°C	4641 4642 4643 4644 4645 4646 4647	
0-120°C	4651 4652 4653 4654 4655 4656 4657	
0-160°C	4661 4662 4663 4664 4665 4666 4667	
0-200°C	4671 4672 4673 4674 4675 4676 4677	
0-300°C	4681 4682 4683 4684 4685 4686 4687	
0-400°C	4681-4 4682-4 4683-4 4684-4 4685-4 4686-4 4687-4	
0-500°C	4691 4692 4693 4694 4695 4696 4697	
0-600°C	4691-6 4692-6 4693-6 4694-6 4695-6 4696-6 4697-6	
Double scale:	-°C/°F  - OPTIONS	
Spare parts:	Glass tubes Immersion tubes  Further measuring ranges and stem lengths on request !	



Type	a	SW	G	t
4000	110	27	1/2A	10
4300	150	27	1/2A	10
4600	200	27	1/2A	10

Masses and dimensions are conform to current company standard. Changes to improve our gauges will be made without preannouncement.