


Upper section:	Aluminium, brass anodised, 30 mm wide - 36 mm wide - Anodised aluminium - Made of shining stainless steel - 360° turnable
Figures:	Beneath an anodic coating
Joint to measuring stem:	Plug-in type - with locking screw
Measuring stem:	G 1/2 A brass - from 300°C on steel - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel 1.4571
Connection:	Form B - immersion tube with threaded socket - Form C union nut
Glass tube:	Elastic mounted, graduation acid-proof
Accuracy class:	1
Filling:	Up to 200°C alcohol blue From 250°C on mercury cap. yellow backed - Alcohol red - Mercury cap. yellow backed or blue shining
Capillary form:	Prismatic or round
Version:	A N G L E 9 0° back entry



Stem Ø 10 mm	L=	40	63	75	100	120	160	200
Measuring range:	Article number							
-30+50°C		4101	4102	4103	4104	4105	4106	4107
-10+50°C		4111	4112	4113	4114	4115	4116	4117
0-50°C		4121	4122	4123	4124	4125	4126	4127
0-60°C		4131	4132	4133	4134	4135	4136	4137
0-100°C		4141	4142	4143	4144	4145	4146	4147
0-120°C		4151	4152	4153	4154	4155	4156	4157
0-160°C		4161	4162	4163	4164	4165	4166	4167
0-200°C		4171	4172	4173	4174	4175	4176	4177
0-250°C		4171-2	4172-2	4173-2	4174-2	4175-2	4176-2	4177-2
0-300°C		4181	4182	4183	4184	4185	4186	4187
0-500°C		4191	4192	4193	4194	4195	4196	4197
+100+600°C		4191-6	4192-6	4193-6	4194-6	4195-6	4196-6	4197-6

Double scale:	-°C/°F - OPTIONS
Spare parts:	Glass tubes Immersion tubes Further measuring ranges and stem lengths on request !

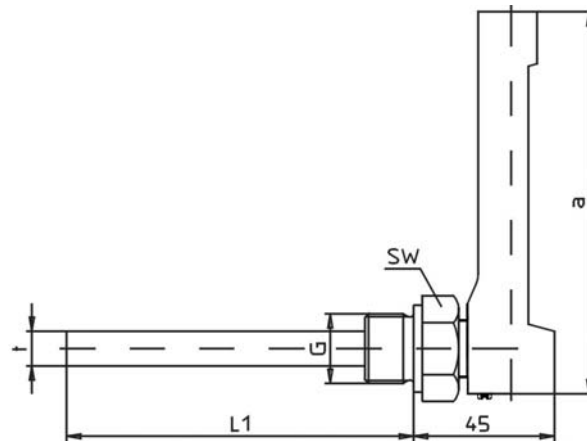

Type	a	SW	G	t
4100	110	27	1/2A	10
4400	150	27	1/2A	10
4700	200	27	1/2A	10

Masses and dimensions are conform to current company standard. Changes to improve our gauges will be made without preannouncement.