

Upper section:	Aluminium, brass anodised, 30 mm wide - 36 mm wide - Anodised aluminium - Made of shining stainless steel - 360° turnable
Figures:	Beneath an anodic coating
Joint to measuring stem:	Plug-in type - with locking screw
Measuring stem:	G 1/2 A brass - from 300°C on steel - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel 1.4571
Connection:	Form B - immersion tube with threaded socket - Form C union nut
Glass tube:	Elastic mounted, graduation acid-proof
Accuracy class:	1
Filling:	Up to 200°C alcohol blue From 250°C on mercury cap. yellow backed - Alcohol red - Mercury cap. yellow backed or blue shining
Capillary form:	Prismatic or round
Version:	A N G L E 9 0° back entry




Stem Ø 10 mm	L=	40	63	75	100	120	160	200
Measuring range:	Article number							
-30+50°C		4401	4402	4403	4404	4405	4406	4407
-10+50°C		4411	4412	4413	4414	4415	4416	4417
0-50°C		4421	4422	4423	4424	4425	4426	4427
0-60°C		4431	4432	4433	4434	4435	4436	4437
0-100°C		4441	4442	4443	4444	4445	4446	4447
0-120°C		4451	4452	4453	4454	4455	4456	4457
0-160°C		4461	4462	4463	4464	4465	4466	4467
0-200°C		4471	4472	4473	4474	4475	4476	4477
0-300°C		4481	4482	4483	4484	4485	4486	4487
0-400°C		4481-4	4482-4	4483-4	4484-4	4485-4	4486-4	4487-4
0-500°C		4491	4492	4493	4494	4495	4496	4497
0-600°C		4491-6	4492-6	4493-6	4494-6	4495-6	4496-6	4497-6

Double scale:	-°C/°F
	- OPTIONS

Spare parts: Glass tubes
Immersion tubes

Further measuring ranges and stem lengths on request !

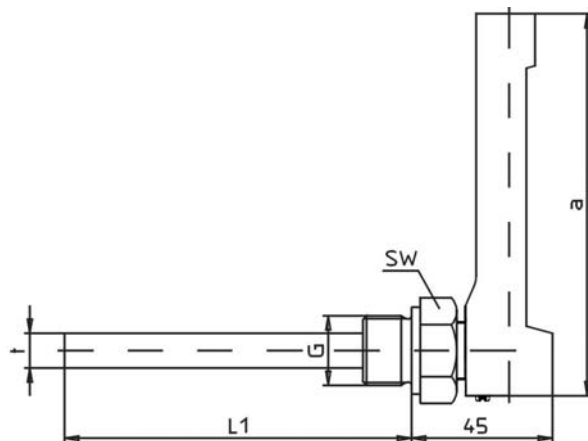

Type	a	SW	G	t
4100	110	27	1/2A	10
4400	150	27	1/2A	10
4700	200	27	1/2A	10

Masses and dimensions are conform to current company standard. Changes to improve our gauges will be made without preannouncement.