


Upper section:	Aluminium, brass anodised, 30 mm wide - 36 mm wide - Anodised aluminium - Made of shining stainless steel - 360° turnable
Figures:	Beneath an anodic coating
Joint to measuring stem:	Plug-in type - with locking screw
Measuring stem:	G 1/2 A brass - from 300°C on steel - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel 1.4571
Connection:	Form B - immersion tube with threaded socket - Form C union nut
Glass tube:	Elastic mounted, graduation acid-proof
Accuracy class:	1
Filling:	Up to 200°C alcohol blue From 250°C on mercury cap. yellow backed - Alcohol red - Mercury cap. yellow backed or blue shining
Capillary form:	Prismatic or round
Version:	A N G L E 90° back entry

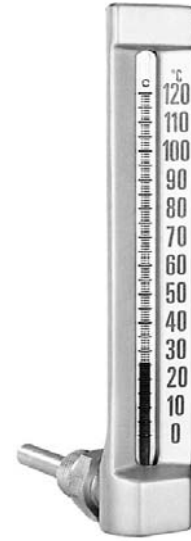


Stem Ø 10 mm	L=	40	63	75	100	120	160	200
Measuring range:	Article number							
-30+50°C		4701	4702	4703	4704	4705	4706	4707
-10+50°C		4711	4712	4713	4714	4715	4716	4717
0-50°C		4721	4722	4723	4724	4725	4726	4727
0-60°C		4731	4732	4733	4734	4735	4736	4737
0-100°C		4741	4742	4743	4744	4745	4746	4747
0-120°C		4751	4752	4753	4754	4755	4756	4757
0-160°C		4761	4762	4763	4764	4765	4766	4767
0-200°C		4771	4772	4773	4774	4775	4776	4777
0-300°C		4781	4782	4783	4784	4785	4786	4787
0-400°C		4781-4	4782-4	4783-4	4784-4	4785-4	4786-4	4787-4
0-500°C		4791	4792	4793	4794	4795	4796	4797
0-600°C		4791-6	4792-6	4793-6	4794-6	4795-6	4796-6	4797-6

Double scale:	-°C/°F
	- OPTIONS

Spare parts: Glass tubes
Immersion tubes

Further measuring ranges and stem lengths on request !

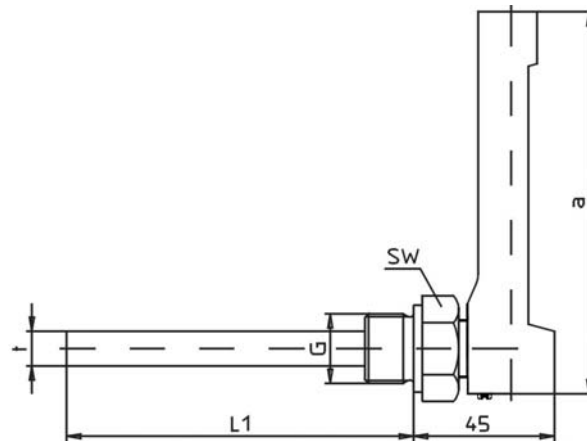

Type	a	SW	G	t
4100	110	27	1/2A	10
4400	150	27	1/2A	10
4700	200	27	1/2A	10

Masses and dimensions are conform to current company standard. Changes to improve our gauges will be made without preannouncement.