

Upper section:	Aluminium, brass anodised, 30 mm wide - 36 mm wide - Anodised aluminium - Made of shining stainless steel
Figures:	Beneath an anodic coating
Joint to measuring stem:	Thread M 18 x 1,5 with locknut
Measuring stem:	G 1/2 A brass - from 300°C on steel - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel 1.4571
Connection:	Form B - immersion tube with threaded socket - Form C union nut
Glass tube:	Elastic mounted, graduation acid-proof
Accuracy class:	1
Filling:	Up to 200°C alcohol blue From 250°C on mercury cap. yellow backed - Alcohol red - Mercury cap. yellow backed or blue shining
Capillary form:	Prismatic or round
Version:	A N G L E 1 3 5 ° back entry




Stem Ø 10 mm	L=	40	63	75	100	120	160	200
Measuring range:	Article number							
-30+50°C		4201	4202	4203	4204	4205	4206	4207
-10+50°C		4211	4212	4213	4214	4215	4216	4217
0-50°C		4221	4222	4223	4224	4225	4226	4227
0-60°C		4231	4232	4233	4234	4235	4236	4237
0-100°C		4241	4242	4243	4244	4245	4246	4247
0-120°C		4251	4252	4253	4254	4255	4256	4257
0-160°C		4261	4262	4263	4264	4265	4266	4267
0-200°C		4271	4272	4273	4274	4275	4276	4277
0-250°C		4271-2	4272-2	4273-2	4274-2	4275-2	4276-2	4277-2
0-300°C		4281	4282	4283	4284	4285	4286	4287

Double scale:	-°C/°F
	- OPTIONS

Spare parts: Glass tubes
Immersion tubes

Further measuring ranges and stem lengths on request !

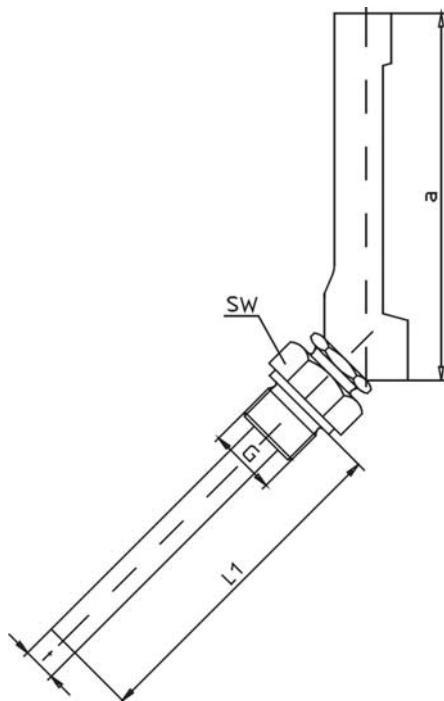

Type	a	SW	G	t
4200	110	27	1/2A	10
4500	150	27	1/2A	10
4800	200	27	1/2A	10

Masses and dimensions are conform to current company standard. Changes to improve our gauges will be made without preannouncement.