

Upper section: Aluminium, brass anodised, 36 mm wide
 - Aluminium, blank anodised

Figures: Beneath an anodic coating

Joint to measuring stem: Thread M 18 x 1,5 with locknut

Measuring stem: G 1/2 A brass
 - Further threads on request
 - Special brass SoMs76 (resistant to seawater)
 - Steel
 - Stainless steel AISI 316 Ti

Connection: Form B - immersion tube with threaded socket
 - Form C - union nut

Glass tube: Elastic mounted, graduation acid-proof

Accuracy class: 1

Filling: Alcohol blue
 - Alcohol red

Capillary form: Prismatic or round




Version: **STRAIGHT**

Stem Ø 10 mm	Length: [mm]						
	40	63	75	100	120	160	200
Measuring range:	Article number:						
-30 +50°C	4001	4002	4003	4004	4005	4006	4007
-10 +50°C	4011	4012	4013	4014	4015	4016	4017
0 -50°C	4021	4022	4023	4024	4025	4026	4027
0 -60°C	4031	4032	4033	4034	4035	4036	4037
0 -100°C	4041	4042	4043	4044	4045	4046	4047
0 -120°C	4051	4052	4053	4054	4055	4056	4057
0 -160°C	4061	4062	4063	4064	4065	4066	4067
0 -200°C	4071	4072	4073	4074	4075	4076	4077
0 -250°C	4081	4082	4083	4084	4085	4086	4087

Double scale: - °C/°F
 - OPTIONS

Spare parts: Glass tubes
 Immersion tubes

Further measuring ranges and stem lengths on request!

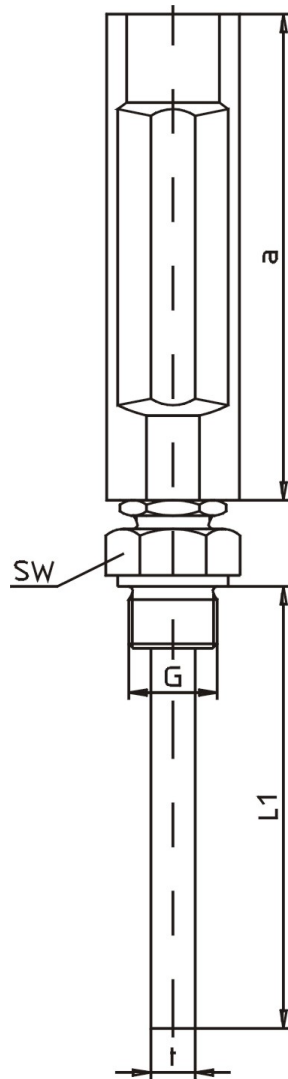

Type	a	SW	G	t
4000	110	27	½ A	10
4300	150	27	½ A	10
4600	200	27	½ A	10

Dimensions and technical data are conform to current company standard.
 Changes to improve our instruments will be made without preannouncement.