

Upper section:	Aluminium, brass anodised, 36 mm wide - Aluminium, blank anodised
Figures:	Beneath an anodic coating
Joint to measuring stem:	Thread M 18 x 1,5 with locknut
Measuring stem:	G 1/2 A brass - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel AISI 316 Ti
Connection:	Form B - immersion tube with threaded socket - Form C - union nut
Glass tube:	Elastic mounted, graduation acid-proof
Accuracy class:	1
Filling:	Alcohol blue - Alcohol red
Capillary form:	Prismatic or round




Version:	STRAIGHT						
Stem Ø 10 mm	Length: [mm]						
	40	63	75	100	120	160	200
Measuring range:	Article number:						
-30 +50°C	4301	4302	4303	4304	4305	4306	4307
-10 +50°C	4311	4312	4313	4314	4315	4316	4317
0 -50°C	4321	4322	4323	4324	4325	4326	4327
0 -60°C	4331	4332	4333	4334	4335	4336	4337
0 -100°C	4341	4342	4343	4344	4345	4346	4347
0 -120°C	4351	4352	4353	4354	4355	4356	4357
0 -160°C	4361	4362	4363	4364	4365	4366	4367
0 -200°C	4371	4372	4373	4374	4375	4376	4377
0 -250°C	4381	4382	4383	4384	4385	4386	4387

Double scale:	- °C/°F
	- OPTIONS

Spare parts: Glass tubes
Immersion tubes

Further measuring ranges and stem lengths on request!

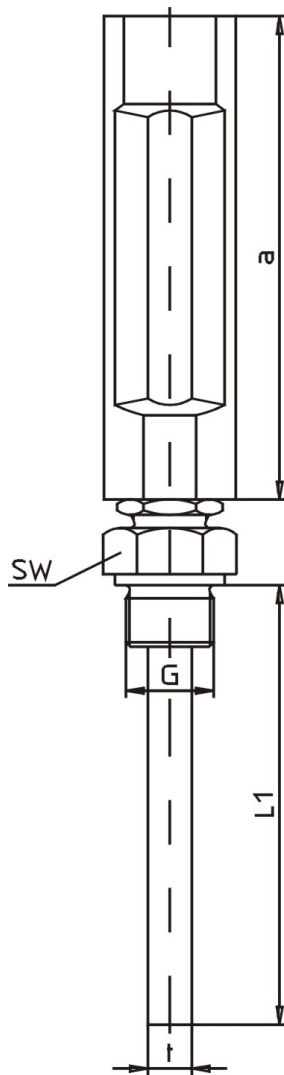

Type	a	SW	G	t
4000	110	27	½ A	10
4300	150	27	½ A	10
4600	200	27	½ A	10

Dimensions and technical data are conform to current company standard.
Changes to improve our instruments will be made without preannouncement.