


| | |
|--------------------------|---|
| Upper section: | Aluminium, brass anodised, 36 mm wide - Aluminium, blank anodised |
| Figures: | Beneath an anodic coating |
| Joint to measuring stem: | Thread M 18 x 1,5 with locknut |
| Measuring stem: | G 1/2 A brass - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel AISI 316 Ti |
| Connection: | Form B - immersion tube with threaded socket - Form C - union nut |
| Glass tube: | Elastic mounted, graduation acid-proof |
| Accuracy class: | 1 |
| Filling: | Alcohol blue - Alcohol red |
| Capillary form: | Prismatic or round |
| Version: | STRAIGHT |
| Stem Ø 10 mm | Length: [mm] 40 63 75 100 120 160 200 |
| Measuring range: | Article number: |
| -30 +50°C | 4601 4602 4603 4604 4605 4606 4607 |
| -10 +50°C | 4611 4612 4613 4614 4615 4616 4617 |
| 0 -50°C | 4621 4622 4623 4624 4625 4626 4627 |
| 0 -60°C | 4631 4632 4633 4634 4635 4636 4637 |
| 0 -100°C | 4641 4642 4643 4644 4645 4646 4647 |
| 0 -120°C | 4651 4652 4653 4654 4655 4656 4657 |
| 0 -160°C | 4661 4662 4663 4664 4665 4666 4667 |
| 0 -200°C | 4671 4672 4673 4674 4675 4676 4677 |
| 0 -250°C | 4681 4682 4683 4684 4685 4686 4687 |
| Double scale: | - °C/°F - OPTIONS |
| Spare parts: | Glass tubes Immersion tubes Further measuring ranges and stem lengths on request! |



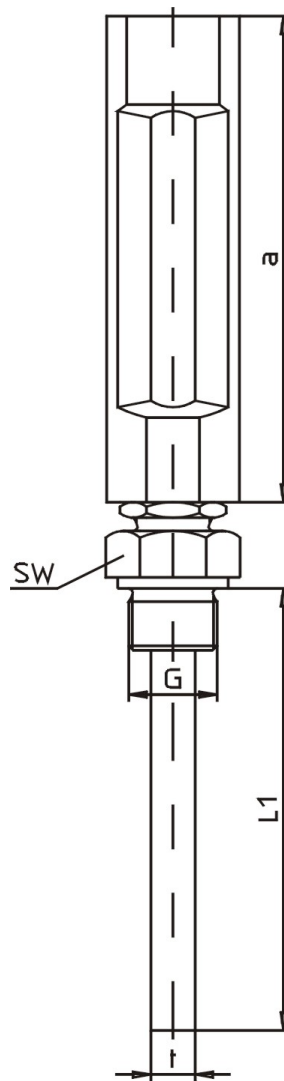

| Type | a | SW | G | t |
|------|-----|----|-----|----|
| 4000 | 110 | 27 | ½ A | 10 |
| 4300 | 150 | 27 | ½ A | 10 |
| 4600 | 200 | 27 | ½ A | 10 |

Dimensions and technical data are conform to current company standard.
 Changes to improve our instruments will be made without preannouncement.