



Upper section:	Aluminium, brass anodised, 36 mm wide - Aluminium, blank anodised - 360° turnable
Figures:	Beneath an anodic coating
Joint to measuring stem:	Plug-in-type, with locking screw
Measuring stem:	G 1/2 A brass - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel AISI 316 Ti
Connection:	Form B - immersion tube with threaded socket - Form C - union nut
Glass tube:	Elastic mounted, graduation acid-proof
Accuracy class:	1
Filling:	Alcohol blue - Alcohol red
Capillary form:	Prismatic or round


Version: **ANGLE 90° back entry**

Stem Ø 10 mm	Length: [mm]						
	40	63	75	100	120	160	200
Measuring range:	Article number:						
-30 +50°C	4101	4102	4103	4104	4105	4106	4107
-10 +50°C	4111	4112	4113	4114	4115	4116	4117
0 -50°C	4121	4122	4123	4124	4125	4126	4127
0 -60°C	4131	4132	4133	4134	4135	4136	4137
0 -100°C	4141	4142	4143	4144	4145	4146	4147
0 -120°C	4151	4152	4153	4154	4155	4156	4157
0 -160°C	4161	4162	4163	4164	4165	4166	4167
0 -200°C	4171	4172	4173	4174	4175	4176	4177
0 -250°C	4181	4182	4183	4184	4185	4186	4187

Double scale:	- °C/°F
	- OPTIONS

Spare parts: Glass tubes
Immersion tubes

Further measuring ranges and stem lengths on request!

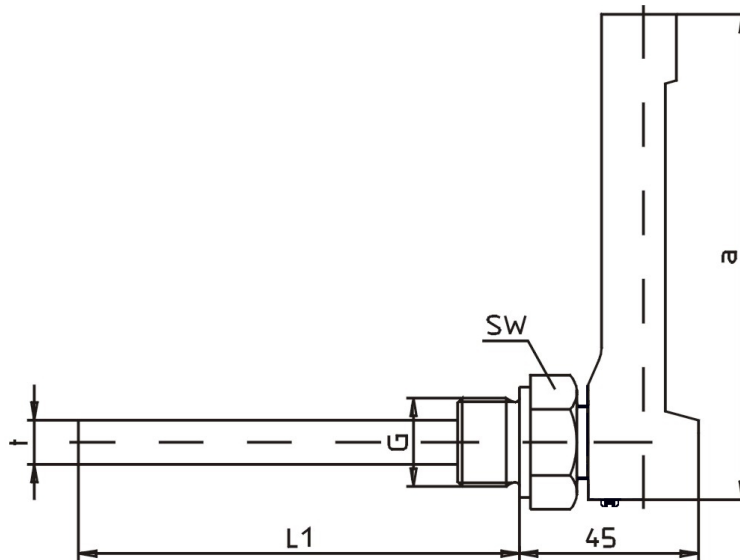

Type	a	SW	G	t
4100	110	27	½ A	10
4400	150	27	½ A	10
4700	200	27	½ A	10

Dimensions and technical data are conform to current company standard.
 Changes to improve our instruments will be made without preannouncement.