

Upper section:	Aluminium, brass anodised, 36 mm wide - Aluminium, blank anodised - 360° turnable
Figures:	Beneath an anodic coating
Joint to measuring stem:	Plug-in-type, with locking screw
Measuring stem:	G 1/2 A brass - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel AISI 316 Ti
Connection:	Form B - immersion tube with threaded socket - Form C - union nut
Glass tube:	Elastic mounted, graduation acid-proof
Accuracy class:	1
Filling:	Alcohol blue - Alcohol red
Capillary form:	Prismatic or round




Version: **ANGLE 90° back entry**

Stem Ø 10 mm	Length: [mm]						
	40	63	75	100	120	160	200
Measuring range:	Article number:						
-30 +50°C	4701	4702	4703	4704	4705	4706	4707
-10 +50°C	4711	4712	4713	4714	4715	4716	4717
0 -50°C	4721	4722	4723	4724	4725	4726	4727
0 -60°C	4731	4732	4733	4734	4735	4736	4737
0 -100°C	4741	4742	4743	4744	4745	4746	4747
0 -120°C	4751	4752	4753	4754	4755	4756	4757
0 -160°C	4761	4762	4763	4764	4765	4766	4767
0 -200°C	4771	4772	4773	4774	4775	4776	4777
0 -250°C	4781	4782	4783	4784	4785	4786	4787

Double scale:	- °C/°F
	- OPTIONS

Spare parts: Glass tubes
Immersion tubes

Further measuring ranges and stem lengths on request!

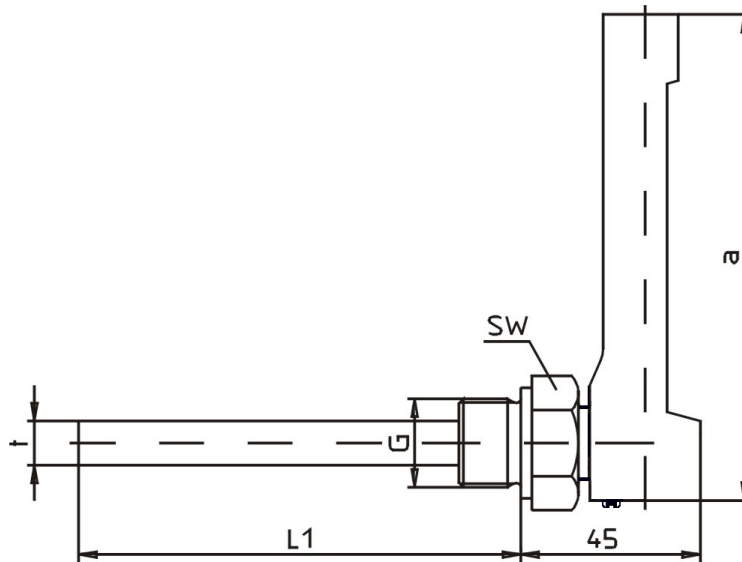

Type	a	SW	G	t
4100	110	27	½ A	10
4400	150	27	½ A	10
4700	200	27	½ A	10

Dimensions and technical data are conform to current company standard.
 Changes to improve our instruments will be made without preannouncement.