



Upper section:	Aluminium, brass anodised, 36 mm wide - Aluminium, blank anodised
Figures:	Beneath an anodic coating
Joint to measuring stem:	Thread M 18 x 1,5 with locknut
Measuring stem:	G 1/2 A brass - Further threads on request - Special brass SoMs76 (resistant to seawater) - Steel - Stainless steel AISI 316 Ti
Connection:	Form B - immersion tube with threaded socket - Form C - union nut
Glass tube:	Elastic mounted, graduation acid-proof
Accuracy class:	1
Filling:	Alcohol blue - Alcohol red
Capillary form:	Prismatic or round


Version: **ANGLE 135° back entry**

Stem Ø 10 mm	Length: [ mm ]						
	40	63	75	100	120	160	200
Measuring range:	Article number:						
-30 +50°C	4501	4502	4503	4504	4505	4506	4507
-10 +50°C	4511	4512	4513	4514	4515	4516	4517
0 -50°C	4521	4522	4523	4524	4525	4526	4527
0 -60°C	4531	4532	4533	4534	4535	4536	4537
0 -100°C	4541	4542	4543	4544	4545	4546	4547
0 -120°C	4551	4552	4553	4554	4555	4556	4557
0 -160°C	4561	4562	4563	4564	4565	4566	4567
0 -200°C	4571	4572	4573	4574	4575	4576	4577
0 -250°C	4581	4582	4583	4584	4585	4586	4587

Double scale:	- °C/°F
	- OPTIONS

Spare parts: Glass tubes  
Immersion tubes

Further measuring ranges and stem lengths on request!

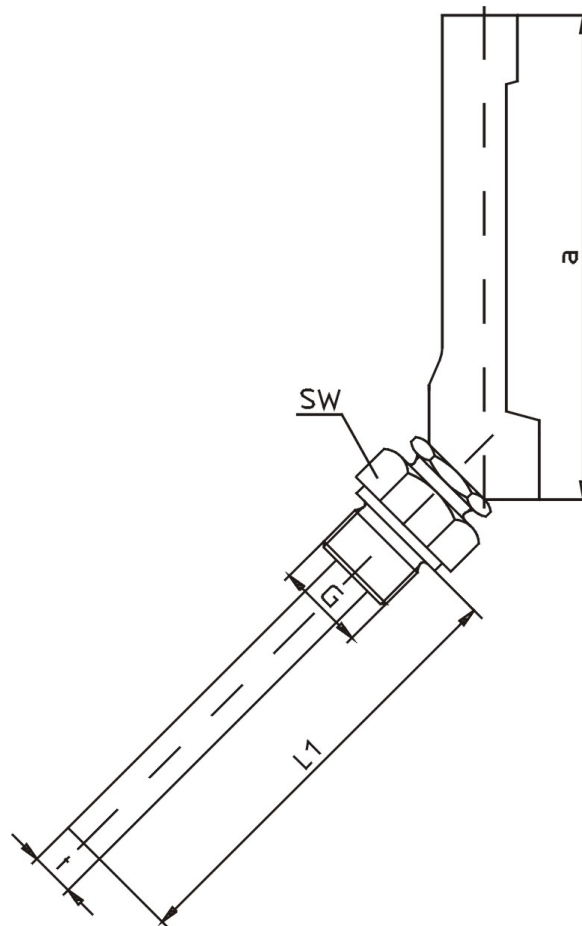

Type	a	SW	G	t
4200	110	27	½ A	10
4500	150	27	½ A	10
4800	200	27	½ A	10

Dimensions and technical data are conform to current company standard.  
Changes to improve our instruments will be made without preannouncement.